

# Polar 60

gültig ab / valid from  
05.07.2023


**0,645 W/m<sup>2</sup>K**

U-Wert  
U-value

**0,24 W/m<sup>2</sup>K**

U-Wert mit ISO-Oberdeckel  
U-value with ISO upper lid

	<b>A</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>
	Lukenkasten frame size	Rohbaumaß rough opening size	lichte Raumhöhe floor to ceiling height	Ausklappraum fold-out space	Grundmaß basic size
<b>Version</b>	L x B x H in mm	L x B in mm	in mm	in mm	in mm
<b>86 / 70*</b>	850 x 690 x 130	860 x 700	max. 2700	500	1150
<b>120 / 60</b>	1190 x 590 x 130	1200 x 600	max. 2800	550	1200
<b>120 / 70</b>	1190 x 690 x 130	1200 x 700	max. 2800	550	1200
<b>130 / 70</b>	1290 x 690 x 130	1300 x 700	max. 2800	450	1200
<b>140 / 70</b>	1390 x 690 x 130	1400 x 700	max. 2800	350	1200

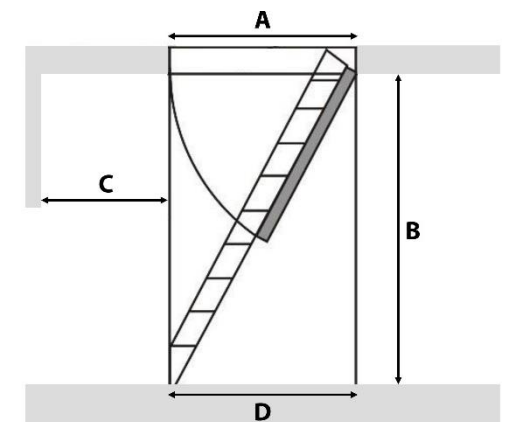

\* 4-teiliges Treppenpaket / 4-section stairpack